


# PRODUCT DATA SHEET


## Tilt Switch

# RBS 040200

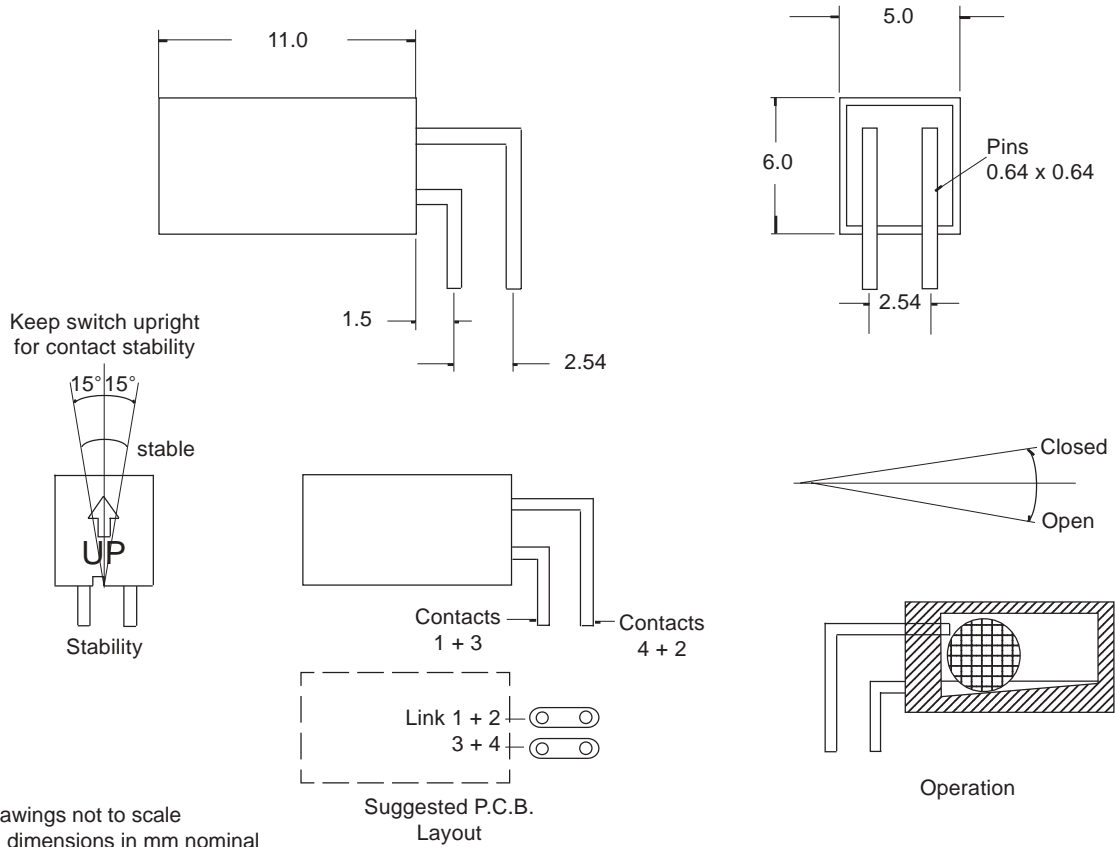

## SPECIFICATION

CONTACT RATING		25mA at 24 Vdc
CONTACT RESISTANCE	Ohms	10
DIFFERENTIAL ANGLE	Deg.	15 from horizontal
OPERATING TEMPERATURE	Deg. °C	-25 +70
CONTACTS		Gold Plated
CASE MATERIAL		Polyamide - UL94V-0
FEATURES		Non-Mercury Contacts

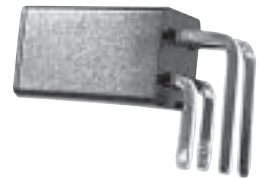

These switches are designed for low current switching or to trigger an I.C. All switches have gold plated contact ball and terminals for improved life. The RBS 04 range has a unique contact rail design which improves switch contact stability with less bounce than conventional switches. The positive closing action, when the switch is tilted, improves contact life and offers an improved stable contact resistance.

Rev. No.	Revision Note	Date
B	Web Site 2003	1-5-03

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and details of our full design and manufacturing service. All products are supplied to our standard conditions of sale otherwise agreed in writing.

©2003  
Active Switch & Sensor Limited